



MASTER TL5 High Output

MASTER TL5 HO 49W/830 UNP

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Product data

• General Characteristics

System Description	High Output
Cap-Base	G5
Cap-Base Information	Green Plate
Bulb	T5 [16 mm]
Life to 10% fail	21000 hr
Preheat EL,3h	
Life to 50% fail	30000 hr
Preheat EL,3h	
LSF HF Preheat	99 %
2000h Rated,3h	
LSF HF Preheat	99 %
4000h Rated,3h	
LSF HF Preheat	99 %
6000h Rated,3h	
LSF HF Preheat	99 %
8000h Rated,3h	
LSF HF Preheat	99 %
12000h Rated,3h	
LSF HF Preheat	97 %
16000h Rated,3h	
LSF HF Preheat	84 %
20000h Rated,3h	

Lum Efficacy Rated	89 Lm/W
HF 25°C	
Lum Efficacy Rated	99 Lm/W
HF 35°C	
LLMF HF 2000h	96 %
Rated	
LLMF HF 4000h	95 %
Rated	
LLMF HF 6000h	94 %
Rated	
LLMF HF 8000h	93 %
Rated	
LLMF HF 12000h	92 %
Rated	
LLMF HF 16000h	91 %
Rated	
LLMF HF 20000h	90 %
Rated	
Design Temperature	35 C
Chromaticity Coordinate X	440 -
Chromaticity Coordinate Y	403 -

• Light Technical Characteristics

Colour Code	830 [CCT of 3000K]
Colour Rendering Index	80 (min), 82 (nom), 85 (max) Ra8
Colour Designation	Warm white
Colour Temperature	3000 K
Luminous Flux EL	4375 Lm
25°C, Rated	
Luminous Flux EL	4375 Lm
25°C, Nominal	
Luminous Flux Lamp	4900 Lm
EL 35°C	

• Electrical Characteristics

Lamp Wattage	49 W
Lamp Wattage EL	49.2 W
25°C, Rated	
Lamp Wattage EL	49.0 W
25°C, Nominal	
Lamp Wattage EL	49.3 W
35°C	
Lamp Voltage EL	195 V
25°C	
Lamp Voltage EL	191 V
35°C	



asimpleswitch.com

PHILIPS

MASTER TL5 High Output

Lamp Current EL 25°C	0.255 A
Lamp Current EL 35°C	0.260 A
Dimmable	yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content	1.4 mg
Energy consumption kWh/1000h	54 kWh

• Measuring Conditions

Calibration Current	0.255 A
HF Generator Rated Voltage	390 V
Resistor	765 ohm

• Product Dimensions



Base Face to Base Face A	1449.0 (max) mm
--------------------------	-----------------

Insertion Length B	1453.7 (min), 1456.1 (max) mm
Overall Length C	1463.2 (max) mm
Diameter D	17 (max) mm

• Product Data

Order code	637529 55
Full product code	871150063752955
Full product name	MASTER TL5 HO 49W/830 UNP
Order product name	MASTER TL5 HO 49W/830 UNP/40
Pieces per pack	1
Packing configuration	40
Packs per outerbox	40
Bar code on pack - EAN1	8711500637529
Bar code on outerbox - EAN3	8711500637536
Logistic code(s) - 12NC	927927583018
ILCOS code	FDH-49/30/1B-L/P-G5-16/1450
Net weight per piece	128.700 gr

Dimensional drawing


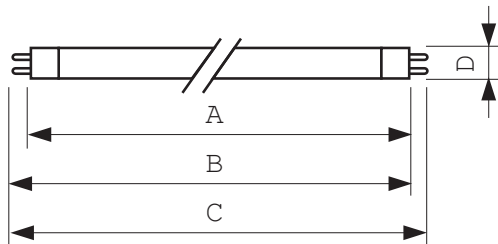


G5

MASTER TL5 HO 49W/830 UNP

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL5 HO 49W/830	1449.0	1453.7	1456.1	1463.2	17

Photometric data

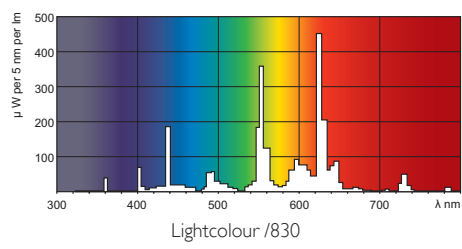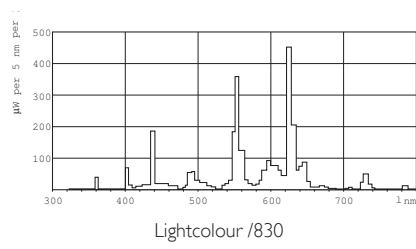

© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, February 23
data subject to change