



# MASTER VALUE LEDs pot LV



# **MASTER LED spot VLE D 5.8-35W MR16 927 36D**

Philips MASTER VALUE MR16 is the series of Low Voltage (12VAC) Halogen MR16 replacements. Not only does it employs Philips' patented solution to guarantee the broadest possible compatibility with standard 12V Halogen electronic transformers. It also delivers beam intensity which is equivalent to the 50W Philips Halogen MR16 lamps. The form-factor of Philips MASTER Value LED MR16 guarantees a 100% form on the back-side of the lamp (exact form with Halogen lamps.)

### **Warnings and Safety**

- · Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- · Not intended for use with emergency light fixtures or exit lights

### **Product data**

General Information	
Cap-Base	GU5.3 [ GU5.3]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Flux measurement reference	Narrow Cone
Light Technical	
Color Code	927 [ CCT of 2700K]
Beam Angle (Nom)	36 °
Luminous Flux (Nom)	450 lm
Luminous Intensity (Nom)	1300 cd
Color Designation	Warm White (WW)
	· · · · · · · · · · · · · · · · · · ·

Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	77.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom	70 %
Luminous Flux in 90° Cone (Rated)	450 lm
Operating and Electrical	
Input Frequency	- Hz
Power (Nom)	5.8 W
Lamp Current (Nom)	510 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s


Datasheet, 2021, September 2 data subject to change

# **MASTER VALUE LEDspot LV**

Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7
Voltage (Nom)	ac electronic 12 V
Temperature	
T-Case Maximum (Nom)	85 ℃
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Shape	MR16 [ 2inch/50mm]
Approval and Application	
Energy Efficiency Class	G
Suitable For Accent Lighting	Yes


6 kWh
453173
871951430718600
MASTER LED spot VLE D 5.8-35W MR16 927
36D
8719514307186
929002492502
1
10
929002492502
0.045 kg

### Dimensional drawing




Product	D	С
MASTER LED spot VLE D 5.8-35W MR16 927 36D	50.5 mm	45.5 mm

# Photometric data






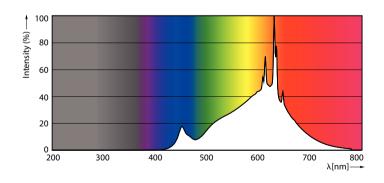

LEDspots MAS 5,8W MR16 GU5,3 927 36D


# **MASTER VALUE LEDspot LV**


### Photometric data



LEDspots MAS 5,8W MR16 GU5,3 927 36D

### Lifetime

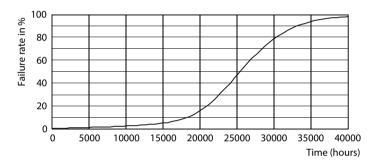

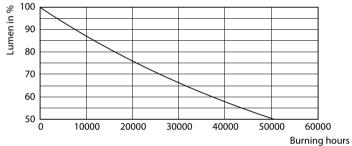

LEDspots LED 25K

LEDspots LMP 25K



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.