

L 30 W/865

LUMILUX T8 | Tubular fluorescent lamps 26 mm, with G13 bases



Areas of application

- Public buildings
- Office lighting
- Industry
- Shops
- Supermarkets and department stores
- Street lighting
- Outdoor applications only in suitable luminaires

Product benefits

- Proven lamp technology
- Good economy thanks to high efficiency
- Available in many different light colors (2,700...8,000 K) for various applications

Product features

- Very good lumen maintenance: 90 % throughout the service lifetime of the lamp
- Good color rendering group: 1B (R_a : 80...89)
- Dimmable
- Top-quality three-band phosphor: LUMILUX



Product datasheet

Technical data



Electrical data

Nominal wattage	30.00 W
Rated lamp efficacy (HF data 25 °C)	Under clarification by authority and standardization body
Rated lamp efficacy (standard condition)	78 lm/W
Rated wattage	30.00 W

Photometrical data

Color rendering index Ra	≥80
Rated luminous flux	2350 lm
Luminous flux at 25 °C	2350 lm
Light color	865
Color temperature	6500 K
Nominal luminous flux	2350 lm
Light color as per EN 12464-1	LUMILUX Cool Daylight
Rated LLMF at 2,000 h	0.95
Rated LLMF at 4,000 h	0.92
Rated LLMF at 6,000 h	0.91
Rated LLMF at 8,000 h	0.90
Rated LLMF at 12,000 h	0.89
Color coordinates chromaticity diagram	0.313/0.337

Dimensions & weight

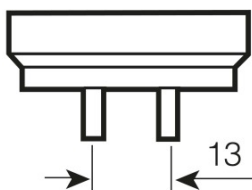

G13
IEC 7004-51
DIN 49653 T1

Tube diameter	26 mm
Length	895.0 mm
Length with base excl. base pins/connection	895.00 mm
Diameter	26.0 mm

Product datasheet

Maximum diameter	26.0 mm
------------------	---------

Temperatures

Rated ambient temp.w.max.luminous flux	25.0 °C
--	---------

Lifespan

Service life	16000 h ¹⁾
Lifespan	20000 h ¹⁾
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.90
Operation mode LLMF/LSF	50 Hz
Rated lamp life time	20000 h
Nominal lamp life time	20000 h

¹⁾ With preheat ECG

Additional product data

Base (standard designation)	G13
Lamp mercury content	2.5 mg
Appropriate disposal acc. to WEEE	Yes


Capabilities

Dimmable	Yes
Suitable for indoor	Yes

Certificates & standards

Energy efficiency class	A
Energy consumption	36 kWh/1000h

Light Distribution

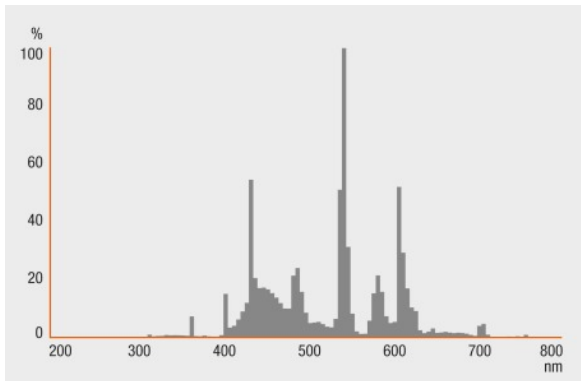

Spectral power distribution

System guarantee

OSRAM System+ Guarantee in combination with OSRAM ECGs



Guarantee

Safety advice

In case of lamp breakage: www.osram.com/brokenlamp

Product datasheet



Circuit diagram

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300518015	L 30 W/865	Shipping carton box 25	937 mm x 260 mm x 232 mm	56.52 dm ³	3910.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

References / Links

For more information on the system guarantee and the terms and conditions of the guarantee visit

- ▶ www.osram.com/system-guarantee

For more information on QUICKTRONIC electronic control gear go to

- ▶ www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

L 30 W/865

LUMILUX T8 | Tubular fluorescent lamps 26 mm, with G13 bases

Product name	Product name ECG	EAN	Nominal current	Nominal wattage + Power loss	Luminous flux at 35 °C	Number of lighting outlets
L 30W/865	HF 1x36/230-240 DIM	4050300297705	0.17 A	36.00 W	2900 lm	1
	HF 2x36/230-240 DIM	4050300350974	0.31 A	71.00 W	2900 lm	2
	QT-FIT 5/8 1x18-39	4008321873927	0.15 A	33.00 W		1
	QT-FIT 5/8 2x18-39	4008321873903	0.27 A	63.00 W		2
	QTi 1x36 DIM	4050300870625	0.16 A	36.00 W	2250 lm	1
	QTi 2x36 DIM	4050300870755	0.31 A	69.00 W	2250 lm	2
	QTi DALI 1x36 DIM	4050300870427	0.16 A	36.00 W	2250 lm	1
	QTi DALI 2x36 DIM	4050300870885	0.31 A	69.00 W	2250 lm	2
	QTP5 1x24-39	4008321329110	0.15 A	33.00 W	3000 lm	1
	QTP5 2x24-39	4008321329417	0.27 A	62.00 W	2850 lm	2
	QTP-OPTIMAL 1x18-40	4008321873743	0.15 A	36.00 W	2850 lm	1
	QTP-OPTIMAL 2x18-40	4008321873767	0.28 A	71.00 W	2850 lm	2

Product name	Product name ECG	EAN	Luminous flux at 25 °C	ECG_1.1 Ambient temperature for lifespan	ECG_1.2 Ambient temperature for lifespan
L 30W/865	HF 1x36/230-240 DIM	4050300297705			
	HF 2x36/230-240 DIM	4050300350974			
	QT-FIT 5/8 1x18-39	4008321873927	3000 lm	40 °C	50 °C

Product datasheet

Product name	Product name ECG	EAN	Luminous flux at 25 °C	ECG_1.1 Ambient temperature for lifespan	ECG_1.2 Ambient temperature for lifespan
	QT-FIT 5/8 2x18-39	4008321873903	3000 lm	40 °C	50 °C
	QTi 1x36 DIM	4050300870625			
	QTi 2x36 DIM	4050300870755			
	QTi DALI 1x36 DIM	4050300870427			
	QTi DALI 2x36 DIM	4050300870885			
	QTP5 1x24-39	4008321329110			
	QTP5 2x24-39	4008321329417			
	QTP-OPTIMAL 1x18-40	4008321873743		40 °C	50 °C
	QTP-OPTIMAL 2x18-40	4008321873767		40 °C	50 °C

Product name	Product name ECG	EAN	ECG_1.3 Ambient temperature for lifespan	ECG_2.1 Tc point temperature for lifespa	ECG_2.2 Tc point temperature for lifespa
L 30W/865	HF 1x36/230-240 DIM	4050300297705			
	HF 2x36/230-240 DIM	4050300350974			
	QT-FIT 5/8 1x18-39	4008321873927	60 °C	55 °C	65 °C
	QT-FIT 5/8 2x18-39	4008321873903	60 °C	55 °C	65 °C
	QTi 1x36 DIM	4050300870625			
	QTi 2x36 DIM	4050300870755			
	QTi DALI 1x36 DIM	4050300870427			
	QTi DALI 2x36 DIM	4050300870885			
	QTP5 1x24-39	4008321329110			
	QTP5 2x24-39	4008321329417			
	QTP-OPTIMAL 1x18-40	4008321873743	60 °C	50 °C	60 °C

Product datasheet

Product name	Product name ECG	EAN	ECG_1.3 Ambient temperature for lifespan	ECG_2.1 Tc point temperature for lifespan	ECG_2.2 Tc point temperature for lifespan
	QTP-OPTIMAL 2x18-40	4008321873767	60 °C	55 °C	60 °C

Product name	Product name ECG	EAN	ECG_2.3 Tc point temperature for lifespan	ECG_3.1 Temperature dependent lifespan	ECG_3.2 Temperature dependent lifespan
L 30W/865	HF 1x36/230-240 DIM	4050300297705			
	HF 2x36/230-240 DIM	4050300350974			
	QT-FIT 5/8 1x18-39	4008321873927	70 °C	100000 h	70000 h
	QT-FIT 5/8 2x18-39	4008321873903	75 °C	100000 h	60000 h
	QTi 1x36 DIM	4050300870625			
	QTi 2x36 DIM	4050300870755			
	QTi DALI 1x36 DIM	4050300870427			
	QTi DALI 2x36 DIM	4050300870885			
	QTP5 1x24-39	4008321329110			
	QTP5 2x24-39	4008321329417			
	QTP-OPTIMAL 1x18-40	4008321873743	70 °C	100000 h	100000 h
	QTP-OPTIMAL 2x18-40	4008321873767	70 °C	100000 h	100000 h

Product name	Product name ECG	EAN	ECG_3.3 Temperature dependent lifespan
L 30W/865	HF 1x36/230-240 DIM	4050300297705	
	HF 2x36/230-240 DIM	4050300350974	
	QT-FIT 5/8 1x18-39	4008321873927	40000 h
	QT-FIT 5/8 2x18-39	4008321873903	40000 h
	QTi 1x36 DIM	4050300870625	

Product datasheet

Product name	Product name ECG	EAN	ECG_3.3 Temperature dependent lifespan
	QTi 2x36 DIM	4050300870755	
	QTi DALI 1x36 DIM	4050300870427	
	QTi DALI 2x36 DIM	4050300870885	
	QTP5 1x24-39	4008321329110	
	QTP5 2x24-39	4008321329417	
	QTP-OPTIMAL 1x18-40	4008321873743	80000 h
	QTP-OPTIMAL 2x18-40	4008321873767	70000 h