Introducing Philips CorePro LED PLC

The first LED PLC lamp designed to save energy and downsize costs

CorePro LED PLC is the first PLC lamp replacement for downlighters that provides up to 60% energy savings, a 3 times longer lifetime (30,000 hours) and a robust, shatter-proof plastic housing. A retrofit lamp that's simple to install, fits fixtures with EM or HF ballast and requires less maintenance and servicing. So you can downsize your downlighting costs with energy efficient LED.



NEW!
The first LED
PL-C lamp



CorePro

LED PL-C 6.5 & 9 W 4-pin

- First A-branded lamp for lamp replacement for conventional PL-C lamps with 4-pin sockets (HF-control gear).
- low energy consumption (> 60% energy saving) and long lasting (twice as long lifetime than fluorescent).
- Price fighter proposition for downlight luminaires in public buildings, corridors and hallways.
- For in office, retail or hospitality applications.
- Not suitable for emergency lighting

What's new:

- In two color temperatures (3000 & 4000 K) and two wattage positions for G24q-2 and G24q-3 socket holders.
- Efficiency up to 120 lm/W.
- < 2 year pay-back, at affordable initial price point as alternative for LED Downlight luminaires.
- Rotating end-caps, to rotate light in the ideal direction.












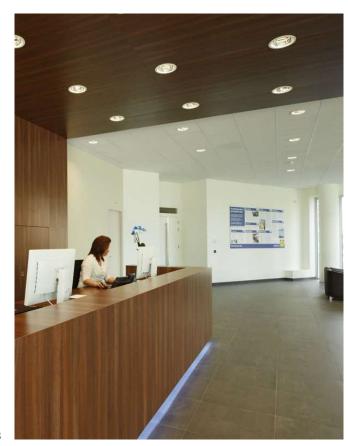

Final information



Product description	Dimensions	Lamp Wattage	Color temp	Lumen output	Operation	CRI	12NC	EOC
	mm	W	K	lm				
CorePro LED PLC 6.5W 830 4P G24q-2	33x140	6.5	3000	600	HF	80	929001201002	871869654119700
CorePro LED PLC 6.5W 840 4P G24q-2	33x140	6.5	4000	650	HF	80	929001201102	871869654121000
CorePro LED PLC 9W 830 4P G24q-3	33x163	9.0	3000	900	HF	80	929001200802	871869654115900
CorePro LED PLC 9W 840 4P G24q-3	33x163	9.0	4000	950	HF	80	929001200902	871869654117300





CorePro

LED PL-C 6.5 & 8.5 W 2-pin

- First A-branded lamp for lamp replacement for conventional PL-C lamps with 2-pin sockets (EM-control gear).
- low energy consumption (> 60% energy saving) and long lasting (twice as long lifetime than fluorescent).
- · Price fighter proposition for downlight luminaires in public buildings, corridors and hallways.
- For in office, retail or hospitality applications.

What's new:

- In two color temperatures (3000 & 4000 K) and two wattage positions for G24d-2 and G24d-3 socket holders.
- Efficiency up to 100 lm/W.
- < 2 years pay-back, at affordable initial price point as alternative for LED Downlight
- Rotating end-caps, to rotate light in the ideal direction.























Final information

Product description	Dimensions	System Wattage	Color temp	Lumen output	Operation	CRI	12NC	EOC
	mm	W	K	lm				
CorePro LED PLC 6.5W 830 2P G24d-2	33x147	6.5	3000	600	EM	80	929001201402	871869654127200
CorePro LED PLC 6.5W 840 2P G24d-2	33x147	6.5	4000	650	EM	80	929001201502	871869654129600
CorePro LED PLC 8.5W 830 2P G24d-3	33x170	8.5	3000	900	EM	80	929001201202	871869654123400
CorePro LED PLC 8.5W 840 2P G24d-3	33x170	8.5	4000	950	EM	80	929001201302	871869654125800





