




## One Piece Single Fixing Cable Cleats

A comprehensive range of single fixing cable cleats to provide a simple, but strong means of securing cables. Suitable for use with cables or pipes up to 50.8mm in overall diameter. The range is augmented by the two part two hole fixing cleats which cover from 50mm to 85mm overall diameter.

### Features

- Manufactured in high strength polypropylene not polythene
- High impact resistance
- Unaffected by corrosive environments
- Higher mechanical strength than polythene
- High level of resistance to ultra violet light
- Stability down to -35°C and up to 105°C constant

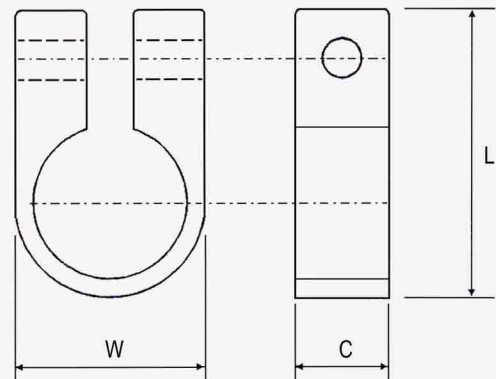

| Standard Part No. | Cable Diameters mm |      | Dimensions mm |      |      | Clearance Bolt Holes | Pack Quantity |
|-------------------|--------------------|------|---------------|------|------|----------------------|---------------|
|                   | Min                | Max  | W             | C    | L    |                      |               |
| C3-100            | 5.0                | 7.6  | 12.5          | 15.0 | 26.5 | 6                    | 100           |
| C4-100            | 7.7                | 10.0 | 15.0          | 15.0 | 27.0 | 6                    | 100           |
| C5-100            | 10.1               | 12.7 | 18.0          | 14.2 | 27.7 | 6                    | 100           |
| C6-100            | 12.6               | 15.2 | 20.0          | 15.0 | 31.0 | 6                    | 100           |
| C7-100            | 15.1               | 17.8 | 23.0          | 15.0 | 33.7 | 6                    | 100           |
| C8-100            | 17.7               | 20.3 | 25.0          | 16.0 | 38.0 | 6                    | 100           |
| C9-100            | 20.2               | 22.8 | 28.5          | 16.0 | 41.0 | 6                    | 100           |
| C10-100           | 22.7               | 25.4 | 30.0          | 16.0 | 44.0 | 6                    | 100           |
| C11-50            | 25.3               | 27.7 | 34.2          | 20.0 | 49.5 | 10                   | 50            |
| C12-50            | 27.6               | 30.5 | 36.0          | 20.0 | 52.0 | 10                   | 50            |
| C14-50            | 30.4               | 35.5 | 42.0          | 21.5 | 59.0 | 10                   | 50            |
| C16-50            | 35.4               | 40.6 | 47.0          | 21.5 | 64.0 | 10                   | 50            |
| C18-50            | 40.5               | 45.7 | 51.0          | 21.5 | 68.5 | 10                   | 50            |
| C20-50            | 45.6               | 50.8 | 56.5          | 21.5 | 73.0 | 10                   | 50            |

Low Smoke Halogen Free & Fire Retardant Cleats (LSF) range available on request.